Measurements of wavelength dependent scattering and backscattering coefficients by low-coherence spectroscopy

Nienke Bosschaart
Dirk J. Faber
Ton G. van Leeuwen
Maurice C. G. Aalders

Measurements of wavelength dependent scattering and backscattering coefficients by low-coherence spectroscopy

Nienke Bosschaart,[a] Dirk J. Faber,[a] Ton G. van Leeuwen,[a,b] and Maurice C. G. Aalders[a]

[a]University of Amsterdam, Biomedical Engineering and Physics, Academic Medical Center, P.O. Box 22700, NL-1100 DE Amsterdam, The Netherlands

[b]University of Twente, Biomedical Photonic Imaging Group, MIRA Institute for Biomedical Technology and Technical Medicine, P.O. Box 217, NL-7500 AE Enschede, The Netherlands

Abstract. Quantitative measurements of scattering properties are invaluable for optical techniques in medicine. However, noninvasive, quantitative measurements of scattering properties over a large wavelength range remain challenging. We introduce low-coherence spectroscopy as a noninvasive method to locally and simultaneously measure scattering μ_s and backscattering μ_b coefficients from 480 to 700 nm with 8 nm spectral resolution. The method is tested on media with varying scattering properties (μ_s = 1 to 34 mm^{-1} and μ_b = 2.10^{-6} to 2.10^{-3} mm^{-1}), containing different sized polystyrene spheres. The results are in excellent agreement with Mie theory. © *2011 Society of Photo-Optical Instrumentation Engineers (SPIE)*. [DOI: 10.1117/1.3553005]

Keywords: spectroscopy; scattering; backscattering; coherence; tissues; Mie theory.

Quantitative determination of the optical properties of tissue is invaluable in biomedical optics. The majority of optical diagnostic techniques rely on the spectral absorption and scattering properties of tissue, which provide information on its composition and structure. The same optical properties are of essential importance for the development and optimization of optical therapeutic techniques. However, despite the existence of many spectroscopic methods, it is still a challenge to do noninvasive, quantitative measurements of the absorption and scattering properties *in vivo* over a large wavelength range.

Recently, we introduced low-coherence spectroscopy (LCS) to do quantitative and localized measurements of absorption coefficients μ_a over a wavelength range of 480 to 700 nm with a spectral resolution of 8 nm[1] (all wavelength dependent parameters in this paper will be denoted by a boldfaced character).

Address all correspondence to: Nienke Bosschaart, University of Amsterdam, Biomedical Engineering and Physics: Academic Medical Center, P.O. Box 22700, NL1100 DE Amsterdam, The Netherlands. Tel: +31-205665207; Fax: +31-206917233; E-mail: n.bosschaart@amc.uva.nl.

In this study, we use LCS to quantitatively and simultaneously measure scattering μ_s and backscattering μ_b coefficients on a wide range of scattering media (μ_s = 1 to 34 mm^{-1} and μ_b = 2.10^{-6} to 2.10^{-3} mm^{-1}). Thereby, we demonstrate new opportunities for noninvasive scattering property measurements. *In vivo* measurements of the quantitative value of μ_s and μ_b can assist in differentiating between tissue types[2] and modeling of light-tissue interactions. The spectrally resolved information of μ_s and μ_b gives additional valuable information such as the power dependency of μ_s on wavelength and wavelength dependent oscillations in μ_b, which have shown to be related to tissue morphology.[3,4]

Whereas extensive study on tissue (back)scattering has been performed in the areas of light scattering spectroscopy[3] and angle-resolved low-coherence interferometry,[4] these studies lack quantification of μ_s and μ_b, since their primary aim has been to retrieve the size of the scattering particles. Quantification of μ_s and μ_b has been shown in optical coherence tomography studies,[2,5] but these studies were limited to the measurement of μ_s and μ_b averaged over the bandwidth of the spectrum, i.e., no spectral information was obtained. Moreover, in these studies, quantitative agreement with theory is rarely obtained for highly scattering media, due to multiple scattering contributions to the signal.[5] Other (diffuse) reflectance spectroscopy techniques are able to measure μ_b and the reduced scattering coefficient μ'_s,[6] but this requires additional information on the scattering anisotropy g to obtain μ_s. Thus, compared to the existing methods for scattering property measurements, LCS offers the unique possibility for a combination of simultaneous, quantitative, and spectrally resolved measurement of μ_s and μ_b. Therefore, these measurements will assist in a more complete, and likely more accurate, characterization of the tissue of interest. In addition, like other low coherence interferometry techniques,[2,5,7] LCS measures a controlled and confined volume, which is important when measuring local optical properties in an often inhomogeneous tissue.

Using LCS, we measured μ_b and μ_s of aqueous nonabsorbing suspensions of different sized polystyrene spheres and validated our results with Mie theory. Therefore, we measured backscattered power spectra $\mathbf{S}(\ell)$ at controlled geometrical path lengths ℓ of the light in a sample. Our LCS system, which is described in detail in Ref. 1, consists of a Michelson interferometer and is optimized for 480 to 700 nm. The geometrical round trip path length ℓ (ℓ = 0 to 2 mm, with ℓ = 0 the sample surface) is controlled by translating the reference mirror, in steps of 27 μm. By translating the sample, focus tracking of the 64 μm^2 spot size in the sample is achieved. Around ℓ, the signal is modulated by scanning the piezo-driven reference mirror (23 Hz) resulting in a scanning window of $\Delta\ell \approx 44$ μm. The optical power at the sample is 6 mW.

A multimode fiber (ø = 62.5 μm) guides the reflected light from both arms to a photodiode. Signal processing after acquisition, which is described in detail in Ref. 1, results in averaged spectra $\mathbf{S}(\ell)$ with 8-nm resolution [∼500 averages per ℓ, to avoid any spectral modulations on $\mathbf{S}(\ell)$ caused by interference between scattering particles]. We describe $\mathbf{S}(\ell)$ with a single exponential decay model (Ref. 2) $\mathbf{S}(\ell)$ = $\mathbf{S_0} \cdot \mathbf{T} \cdot \Delta\ell \cdot \mu_{\mathbf{b,NA}} \cdot \exp(-\mu_{\mathbf{t}} \cdot \ell)$,[2] where $\mathbf{S_0}$ is the source

power spectrum and **T** is the system coupling efficiency. When $\mathbf{S}(\ell)$ is dominated by a single backscattered light, μ_t is the attenuation coefficient of the sample and μ_t equals μ_s for nonabsorbing samples (this study). The system dependent parameters will be denoted by $\zeta = \mathbf{S_0} \cdot \mathbf{T} \cdot \Delta \ell$. The spectra $\mathbf{S}(\ell)$ are collected over the detection numerical aperture (**NA**) of the system, therefore, we define the measured backscattering coefficient $\mu_{b,NA}$ as the product of μ_s and the phase function $\mathbf{p}(\theta)$, integrated over the solid angle of the **NA** in the medium:

$$\mu_{b,NA} = \mu_s \cdot 2\pi \int_{\theta=\pi-NA}^{\pi} \mathbf{p}(\theta) \cdot \sin(\theta) \cdot d\theta. \quad (1)$$

We measured the wavelength dependent point spread function in the medium[7] and derived the **NA** (ranging from 0.035 to 0.045 between 480 to 700 nm) from the resulting Rayleigh length of the system. The terms $\zeta \cdot \mu_{b,NA}$ and μ_s are obtained by fitting a two-parameter (amplitude and decay, respectively) exponential function to $\mathbf{S}(\ell)$ versus ℓ. Uncertainties are estimated by the 95% confidence intervals (c.i.) of the fitted parameters.[1] The model is fitted to the measured $\mathbf{S}(\ell)$ up to a path length in the sample of five times the mean free path ($5/\mu_s$ from Mie theory at 480 nm, varying from 100 to 1950 μm). Spectra acquired from $\ell < 50$ μm suffer from boundary artifacts and are therefore excluded from the fits. Prior to fitting the model to $\mathbf{S}(\ell)$, a noise level is subtracted from $\mathbf{S}(\ell)$, which is the sum of the dc spectra of the sample and reference arm. Now, $\mu_{b,NA}$ can be calculated from the fitted amplitude $\zeta \cdot \mu_{b,NA}$, if ζ is determined in a separate calibration measurement in which $\mu_{b,NA}$ is exactly known from Mie theory and Eq. (1). To this end, we used National Institute of Standards and Technology (NIST)-certified polystyrene spheres of $\varnothing = 409 \pm 9$ nm (diameter $\pm$ SD, Thermo Scientific, USA). The obtained ζ was used to determine $\mu_{b,NA}$ in subsequent measurements.

In our Mie calculations, we used wavelength dependent refractive indices of water and polystyrene[8] and integrated over the size distribution of the spheres (2*SD), given by the manufacturer. Brownian motion of the polystyrene spheres causes Doppler broadening of the measured LCS spectra. For adequate comparison, we convolved the Mie spectra with a Lorentzian, with a linewidth of 5 to 13 nm, depending on the sphere size-dependent Doppler frequency distribution of the Brownian motion of the spheres, similar to our analysis in Ref. 1.

Figure 1(a) shows LCS measurements (dots) of μ_s for four aqueous suspensions of different sized NIST-certified polystyrene spheres: 0.071% with $\varnothing = 409 \pm 9$ nm, 0.048% with $\varnothing = 602 \pm 6$ nm, 0.038% with $\varnothing = 799 \pm 9$ nm, and 0.033% with $\varnothing = 1004 \pm 10$ nm, which lie within the range of scatterer sizes in biological cells.[3] The sphere concentrations, indicated in volume percentages, were chosen such that μ_s was approximately equal for all samples (~ 1.5 mm^{-1} at 600 nm). The LCS measurements agree within 0.2 mm^{-1} with μ_s from Mie theory (thick solid lines) over the entire wavelength range of 480 to 700 nm. The scattering coefficient has a power dependence on wavelength, with different scatter power for different particle sizes. We also measured the attenuation coefficient of water, which, as expected, is ~ 0 mm^{-1} for all wavelengths.

Figure 1(b) shows the LCS measurements (dots) of $\mu_{b,NA}$ on a logarithmic scale for the polystyrene suspensions, after measuring ζ on the 409-nm sample. The error bars in this graph are on the same order of magnitude as the marker size. The $\mu_{b,NA}$ differ
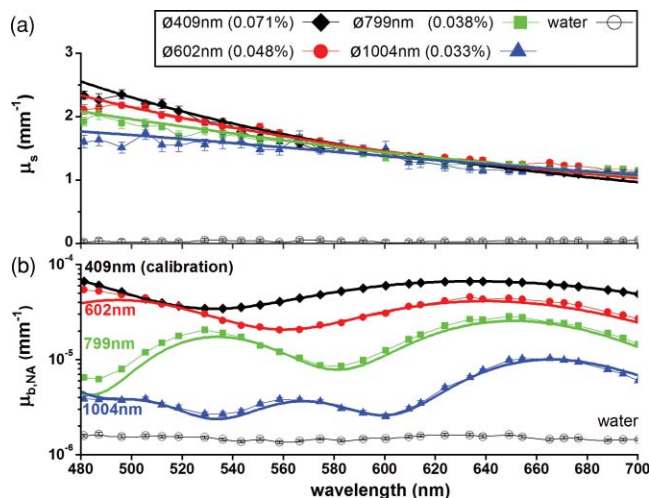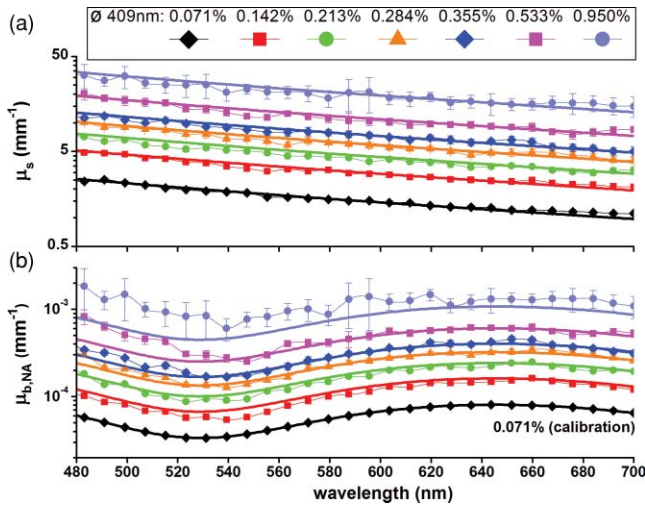

Fig. 1 LCS (dots) and Mie (thick solid lines) results for (a) scattering coefficients μ_s, and (b) backscattering coefficients $\mu_{b,NA}$ for four aqueous suspensions of different sized polystyrene spheres and water. Error bars, representing the 95% c.i. of the fitted values, may fall behind data points. The $\mu_{b,NA}$ were calibrated using the 409-nm sample.

over an order of magnitude between samples, since the phase function changes considerably with sphere size. The measured $\mu_{b,NA}$ are in agreement with Mie theory (thick solid lines), showing the characteristic sphere size dependent oscillations. The $\mu_{b,NA}$ of water shows no pronounced spectral features, which implies that our calibration method was applied correctly. We attribute the small differences between measurements and Mie calculations to uncertainties in particle size distribution and refractive index that were used as Mie-input (depending on wavelength, a 1% change in the polystyrene refractive index results in a 11 to 14% change in μ_s and a 11 to 25% change in $\mu_{b,NA}$).

To test the range of validity of the single exponential decay model to obtain μ_s and $\mu_{b,NA}$, it is important to also test the model for media with higher scattering densities. Therefore, we increased the particle concentration for the 409 nm sample several times (from 0.071% to 0.950%) and measured μ_s and $\mu_{b,NA}$. Figure 2(a) shows that the measured μ_s agrees with Mie calculations of μ_s within 14%, up to values as high as 34 mm^{-1}, which lies well within the range of tissue scattering. In addition, the measured $\mu_{b,NA}$ is in agreement with Mie theory [(Fig. 2(b)], except for the two highest volume concentrations, where the measurement overestimates $\mu_{b,NA}$ at the shorter wavelengths.

The measurements of μ_s in Figs. 1(a) and 2(a) demonstrate that disagreement with the Mie calculated values for the highest volume concentrations (Fig. 2) is only manifested in $\mu_{b,NA}$ and not in μ_s (i.e., μ_s agrees with the Mie calculated μ_s within the 95% c.i.). For these samples (0.533% and 0.950%), the average surface-to-surface distance between the spheres is comparable to the wavelength: 760 and 556 nm, respectively. Since the effect of multiple scattering would be visible in the measured value of both coefficients, we speculate that another effect may cause this disagreement, i.e., the total scattered field cannot be treated as the superposition of the scattered field by the individual particles (dependent scattering).[9] Our results indicate that for these sphere concentrations, $\mu_{b,NA}$ is altered to favor more backward than forward directed scattering. Further study is needed to assess the influence of the particle phase function and interparticle distance on the measured μ_s and $\mu_{b,NA}$.

Fig. 2 LCS (dots) and Mie (thick solid lines) results for (a) scattering coefficients μ_s, and (b) backscattering coefficients $\mu_{b,NA}$ for six concentrations of 409-nm polystyrene sphere suspensions. Error bars, representing the 95% c.i. of the fitted values, may fall behind data points. The $\mu_{b,NA}$ were calibrated using the 0.071% sample.

The presented results show that LCS enables sample characterization based on absolute values of $\mu_{b,NA}$ and μ_s, the scatter power in μ_s and oscillations in $\mu_{b,NA}$. This very combination of optical properties is characteristic for particle or tissue type[2–7] and therefore offers new opportunities for tissue characterization. Clinical studies have been reported where the measurement of only one parameter was not sufficient to differentiate between tissue types, such as the value of μ_t for measuring (morphological) changes between grades of urothelial carcinoma of the bladder.[10] For these studies, the measurement of both μ_s and $\mu_{b,NA}$ by LCS may assist in better differentiation because low contrast in μ_s can be accompanied by high contrast in $\mu_{b,NA}$ (Fig. 1).

In nonabsorbing samples, μ_s is extracted directly from the measurement and $\mu_{b,NA}$ requires calibration on a sample with known $\mu_{b,NA}$. To obtain μ_s from tissue, the measured μ_t needs to be corrected for tissue absorption. Several methods to separate μ_s and μ_a from a single attenuation profile have been proposed.[11,12] In addition, the simultaneous measurement of both μ_t and $\mu_{b,NA}$ by LCS may eventually assist in separating scattering and absorption contributions to the LCS signal, since the $\mu_{b,NA}$ is proportional to μ_s but independent of μ_a.

Whereas in this study, the scattering properties are measured in nonlayered, homogeneous samples, LCS has the potential to measure μ_s and $\mu_{b,NA}$ in individual layers of layered media such as human skin. The controlled path length and the confined measurement volume due to the confocality of the system, in principle, allow to measure within a layer of choice, which will be a subject of further study. Even for a confined tissue volume, the $\mu_{b,NA}$ is likely to consist of the contribution of a range of scatterer sizes and therefore, it will not exhibit oscillations as clearly presented in Figs. 1 and 2. Nevertheless, tissue specific spectral features in backscattering have been observed[3,4] and also the absolute value of $\mu_{b,NA}$ contains information on tissue type.[2]

In conclusion, we present quantitative and wavelength dependent measurements of scattering and backscattering coefficients from polystyrene sphere suspensions. Our method applies for a broad range of sphere sizes and particle densities, and is in excellent agreement with Mie theory up to scattering coefficients as high as 34 mm^{-1}. LCS measures μ_s and μ_b simultaneously, over a large wavelength range and with good spectral resolution. The combined wavelength dependent information of μ_s and μ_b is likely to assist in more accurate tissue characterization in tissue optics.

References

1. N. Bosschaart, M. C. G. Aalders, D. J. Faber, J. J. A. Weda, M. J. C. van Gemert, and T. G. van Leeuwen, "Quantitative measurements of absorption spectra in scattering media by low-coherence spectroscopy," *Opt. Lett.* **34**, 3746–3748 (2009).
2. J. M. Schmitt, A. Knuttel, and R. F. Bonner, "Measurement of optical properties of biological tissues by low-coherence reflectometry," *Appl. Opt.* **32**, 6032–6042 (1993).
3. A. H. Hielscher, J. R. Mourant, and I. J. Bigio, "Influence of particle size and concentration on the diffuse backscattering of polarized light from tissue phantoms and biological cell suspensions," *Appl. Opt.* **36**, 125–135 (1997).
4. A. Wax, C. Yang, V. Backman, K. Badizadegan, C. W. Boone, R. R. Dasari, and M. S. Feld, "Cellular organization and substructure measured using angle-resolved low-coherence interfometry," *Biophys. J.* **82**, 2256–2264 (2002).
5. A. L. Oldenburg, M. N. Hansen, D. A. Zweifel, A. Wei, and S. A. Boppart, "Plasmon resonant gold nanorods as low backscattering albedo contrast agents in optical coherence tomography," *Opt. Express* **14**, 6724–6738 (2006).
6. C. Ungureanu, A. Amelink, R. G. Rayavarapu, H. J. C. M. Sterenborg, S. Manohar, and T.G. van Leeuwen, "Differential path-length spectroscopy for the quantitation of optical properties of gold nanoparticles," *ACS Nano* **4**, 4081–4089 (2010).
7. D. J. Faber, F. J. Van Der Meer, and M. C. Aalders, T. G. van Leeuwen, "Quantitative measurement of attenuation coefficients of weakly scattering media using optical coherence tomography," *Opt. Expr.* **12**, 4353–4365 (2004).
8. S. N. Kasarova, N. G. Sultanova, C. D. Ivanov, and I. D. Nikolov, "Analysis of the dispersion of optical plastic materials," *Opt. Mater.* **29**, 1481–1490 (2004).
9. G. Göbel, J. Kuhn, and J. Fricke, "Dependent scattering effects in latex-sphere suspensions and scattering powders," *Waves Random Complex Media* **5**, 413–426 (1995).
10. E. C. C. Cauberg, D. M. de Bruin, D. J. Faber, T. M. de Reijke, M. Visser, J. J. M. C. H. de la Rosette, and T. G. van Leeuwen, "Quantitative measurement of attenuation coefficients of bladder biopsies using optical coherence tomography for grading urothelial carcinoma of the bladder," *J. Biomed. Opt.* **15**, 066013 (2010).
11. F. E. Robles and A. Wax, "Separating the scattering and absorption coefficients using the real and imaginary parts of the refractive index with low-coherence interferometry," *Opt. Lett.* **35**, 2843–2845 (2010).
12. C. Xu, D. L. Marks, M.N. Do, and S. A. Boppart, "Separation of absorption and scattering profiles in spectroscopic optical coherence tomography using a least-squares algorithm," *Opt. Express* **12**, 4790–4803 (2004).